


## PRODUCT DATASHEET

# ST LINE R7s 118.00 mm 150 17.5 W/2700 K R7s

LED STAR LINE R7s | Double-ended special LED lamps

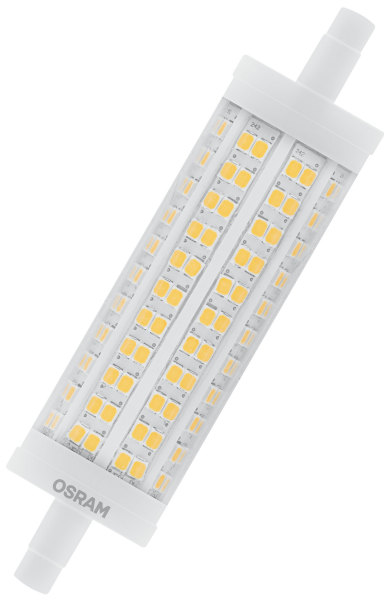

### Areas of application

- Hospitality
- Domestic applications
- Outdoor applications only in suitable luminaires

### Product benefits

- Long lifetime of up to 15,000 h
- Low energy consumption
- Three year guarantee
- Good all-around light emission
- Fits into most R7s luminaires thanks to excentric base

### Product features

- LED alternative to conventional R7s lamps



## TECHNICAL DATA

### Electrical data

Nominal wattage	17.5 W
Construction wattage	17.50 W
Nominal voltage	220...240 V
Claimed equiv. conventional lamp power	150 W
Nominal current	140 mA
Inrush current	7.7 A
Operating frequency	50/60 Hz
Mains frequency	50/60 Hz
Max. lamp no. on circuit break. 10 A (B)	22
Max. lamp no. on circuit break. 16 A (B)	35
Power factor $\lambda$	0.50


### Photometrical data

Luminous flux	2452 lm
Nominal useful luminous flux 90°	2452 lm
Luminous efficacy	140 lm/W
Lumen main.fact.at end of nom.life time	0.70
Light color (designation)	Warm White
Color temperature	2700 K
Color rendering index Ra	$\geq 80$
Light color	827
Standard deviation of color matching	$\leq 6$ sdcn
Rated LLMF at 6,000 h	0.80

### Light technical data

Beam angle	360 °
Warm-up time (60 %)	< 0.50 s
Starting time	< 0.5 s
Rated beam angle (half peak value)	360.00 °

### Dimensions & Weight



Overall length	118.00 mm
Diameter	28.00 mm
Maximum diameter	28 mm
Product weight	112.00 g

### Temperatures & operating conditions

Ambient temperature range	-20...+40 °C
Maximum temperature at tc test point	103 °C

### Lifespan

Lifespan	15000 h
Number of switching cycles	100000
Lumen maintenance at end of serv	0.70
Rated lamp survival factor at 6,000	≥ 0.90

### Additional product data

Base (standard designation)	R7s
Mercury content	0.0 mg

### Capabilities

Dimmable	No
----------	----

### Certificates & Standards

Energy efficiency class	D <sup>1)</sup>
Energy consumption	18.00 kWh/1000h
Type of protection	IP20
Photobiological safety group acc. to EN62778	RG0

<sup>1)</sup> Energy efficiency class (EEC) on a scale of A++ (highest efficiency) to E (lowest efficiency)

### Country-specific categorizations

Order reference	LED SLI118150 17
-----------------	------------------

### Energy labelling regulation data acc EU 2019/2015

Light source cap-type (or other electric interface)	R7s
Correlated colour temperature type	SINGLE_VALUE

Length	118.00 mm
Height	28.00 mm
Width	28.00 mm
EPREL ID	1402930
Model number	AC11779

### Safety advice

- To ensure full light efficiency and product lifetime, it is recommended to detach any glass or cover of the luminaire.

### LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075138469	Blister 1	37 mm x 140 mm x 120 mm	124.00 g	0.62 dm <sup>3</sup>
4058075138476	Shipping box 9	345 mm x 153 mm x 136 mm	1249.00 g	7.18 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

### References / Links

- For further products and actual information concerning LED lamps see [www.osram-lamps.com/led-lamps](http://www.osram-lamps.com/led-lamps)
- For Guarantee see [www.osram-lamps.com/guarantee](http://www.osram-lamps.com/guarantee)

### DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.