

PRODUCT DATASHEET

LED FACADE INDIRECT 13 W 3000 K RD WT

OUTDOOR FACADE INDIRECT | Luminaires with rotatable head and indirect light



AREAS OF APPLICATION

- Outdoor
- Building facades
- Decorative illumination

PRODUCT BENEFITS

- Energy-efficient thanks to LED technology
- 5 years guarantee
- Easy and quick installation
- Homogeneous light output

PRODUCT FEATURES

- Bright and functional outdoor LED luminaires
- Type of protection: IP54
- Die-cast aluminum housing
- Available in two housing colors: white and dark gray
- Swivel angle: 90°
- Diffuser made of opal PMMA



TECHNICAL DATA

Electrical data

| | |
|------------------------------------------|---------------|
| Operating mode | Mains voltage |
| Mains frequency | 50/60 Hz |
| Power factor λ | >0.5 |
| Nominal wattage | 13.00 W |
| Nominal voltage | 220...240 V |
| Nominal current | 0.063 A |


Photometrical data

| | |
|---------------------------------------------|---------------------|
| Color temperature | 3000 K |
| Luminous efficacy | 50 lm/W |
| Luminous flux | 640 lm |
| Light color (designation) | Warm White |
| Color rendering index Ra | ≥ 80 |
| Standard deviation of color matching | <6 sdc _m |

Light technical data

| | |
|-------------------|-------|
| Beam angle | 240 ° |
|-------------------|-------|

— Dimensions & weight

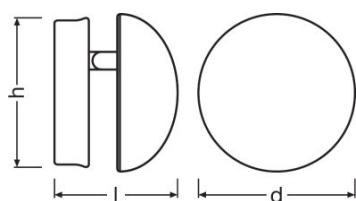

| | |
|-----------------------|----------|
| Diameter | 150.0 mm |
| Height | 118.0 mm |
| Product weight | 790.00 g |

Colors & materials

| | |
|----------------------|----------|
| Housing color | White |
| Product color | White |
| Body material | Aluminum |

| | |
|-----------------------|-------------------------------|
| Cover material | Polymethylmethacrylate (PMMA) |
|-----------------------|-------------------------------|

Temperatures & operating conditions

| | |
|----------------------------------|-------------|
| Ambient temperature range | -20...40 °C |
|----------------------------------|-------------|

Lifespan

| | |
|-----------------------------------|---------|
| Number of switching cycles | 15000 |
| Lifespan L70 at 25 °C | 30000 h |
| Lifespan L80 at 25 °C | - h |
| Lifespan L90 at 25 °C | - h |

Additional product data

| | |
|--------------------------|---------|
| Mounting type | Surface |
| Mounting location | Wall |



Capabilities

| | |
|-------------------------------|------------------------|
| Dimmable | No |
| Type of connection | Screw terminal, 3-Pole |
| LED module replaceable | Not replaceable |

Certificates & standards

| | |
|------------------------------------------------|------|
| Type of protection | IP54 |
| Protection class | I |
| Protection class IK (shock resistance) | IK06 |
| Glow Wire Test according to IEC 695-2-1 | - |
| Photobio. safety group acc. to EN62471 | RG 0 |
| Standards | CE |

Light Distribution

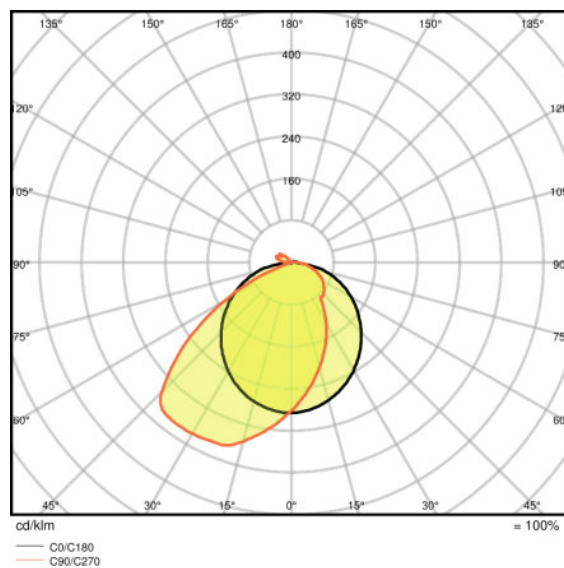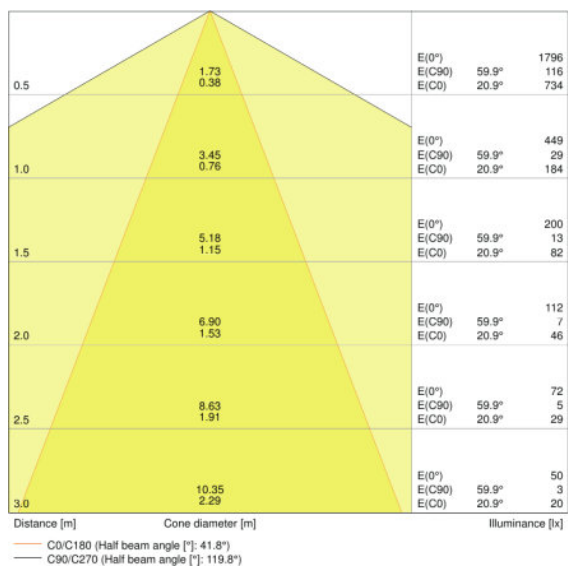

LDC typ cone

LDC typ polar

EQUIPMENT / ACCESSORIES

- Complete mounting and connecting accessories included

LOGISTICAL DATA

| Product code | Packaging unit (Pieces/Unit) | Dimensions (length x width x height) | Gross weight | Volume |
|---------------|------------------------------|--------------------------------------|--------------|-----------------------|
| 4058075075030 | Folding carton box 1 | 138 mm x 170 mm x 170 mm | 849.00 g | 3.99 dm ³ |
| 4058075075047 | Shipping carton box 6 | 300 mm x 275 mm x 185 mm | 5308.00 g | 15.26 dm ³ |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

REFERENCES / LINKS

For Guarantee see

- ▶ www.ledvance.com/guarantee

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.