


# PRODUCT DATASHEET

## PPRO PAR 16 35 36° 4.9 W/3000 K GU10 DIM

PARATHOM PRO PAR16 | Dimmable LED reflector lamps PAR16 with retrofit pin base

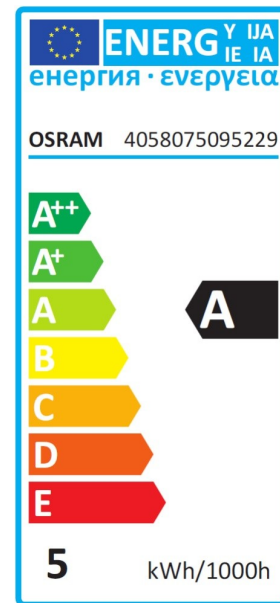

### PRODUCT BENEFITS

- Short payback period thanks to low energy consumption and maintenance costs
- Premium light quality thanks to high color rendering index and narrow binning
- Easy replacement of halogen lamps due to compact full glass design and single optic

### PRODUCT FEATURES

- Professional LED alternative to high voltage halogen lamps
- Very high color rendering ( $R_a: 90$ )
- Very high color consistency:  $\leq 3$  SDCM
- Dimmable (with many common dimmers, see also [www.ledvance.com/dim](http://www.ledvance.com/dim))
- Made in Germany (versions up to 35 W)
- Mercury-free lamps



**TECHNICAL DATA**

## Electrical data

<b>Rated wattage</b>	4.90 W
<b>Nominal wattage</b>	4.90 W
<b>Nominal voltage</b>	220...240 V
<b>Claimed equiv. conventional lamp power</b>	35 W
<b>Operating frequency</b>	50...60 Hz
<b>Power factor <math>\lambda</math></b>	> 0.70

## Photometrical data

<b>Nominal luminous flux</b>	230 lm
<b>Rated luminous flux</b>	230 lm
<b>Rated color temperature</b>	3000 K
<b>Lumen main.fact.at end of nom.life time</b>	0.70
<b>Light color (designation)</b>	Warm White
<b>Color temperature</b>	3000 K
<b>Luminous flux</b>	230 lm
<b>Color rendering index Ra</b>	97
<b>Standard deviation of color matching</b>	$\leq 3$ sdc <sub>m</sub>
<b>Color rendering index Ra</b>	97
<b>Nominal useful luminous flux 90°</b>	230 lm
<b>Rated useful luminous flux 90°</b>	230 lm
<b>Rated peak intensity</b>	690 cd

## Light technical data

<b>Beam angle</b>	36 °
<b>Warm-up time (60 %)</b>	< 0.50 s
<b>Starting time</b>	< 0.5 s
<b>Nominal beam angle</b>	36 °
<b>Rated beam angle (half peak value)</b>	36.00 °

Dimensions & weight



<b>Overall length</b>	55.0 mm
<b>Diameter</b>	51.0 mm
<b>Outer bulb</b>	PAR51
<b>Length</b>	55.0 mm
<b>Maximum diameter</b>	51.0 mm

Temperatures & operating conditions

<b>Maximum temperature at tc test point</b>	75 °C
---	-------

Lifespan

<b>Nominal lamp life time</b>	40000 h
<b>Rated lamp life time</b>	40000 h
<b>Number of switching cycles</b>	100000

Additional product data

<b>Base (standard designation)</b>	GU10
<b>Mercury content</b>	0.0 mg
<b>Mercury-free</b>	Yes
<b>Show WEEE picto</b>	Yes
<b>Product remark</b>	All technical parameters apply to the entire lamp/Due to the complex production process for light-emitting diodes, the typical values shown for the technical LED parameters are purely statistical values that do not necessarily match the actual technical parameters of each individual product, which can vary from the typical value

Capabilities

<b>Dimmable</b>	Yes
-----------------	-----

Certificates & standards

<b>Energy efficiency class</b>	A
--------------------------------	---

Energy consumption



5 kWh/1000h

Country-specific categorizations

Order reference


LPPAR16D3536 4,

Light Distribution

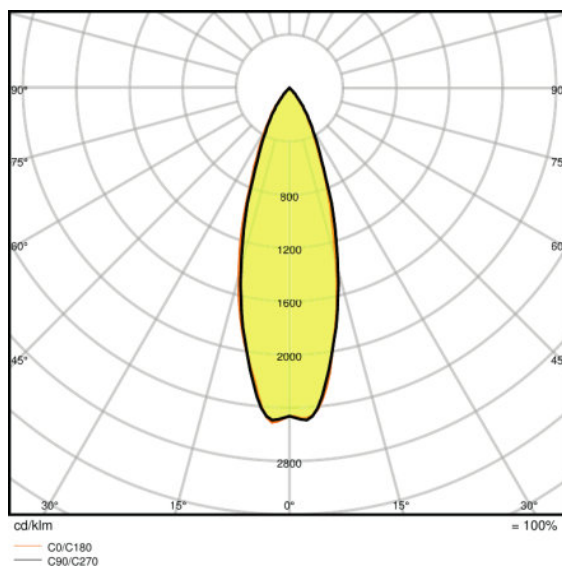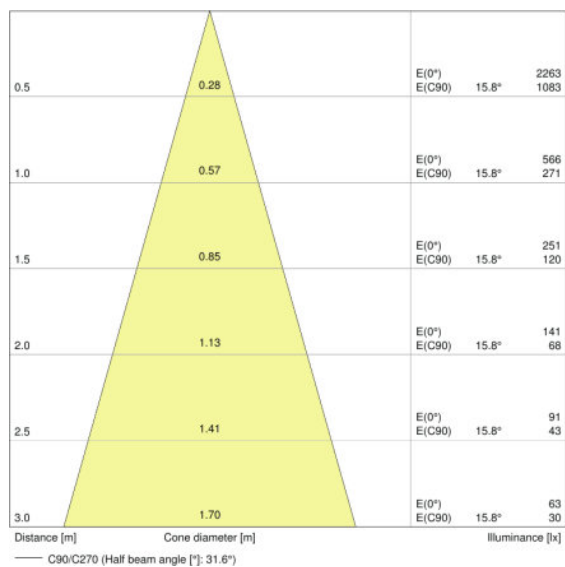

LDC typ cone

LDC typ polar

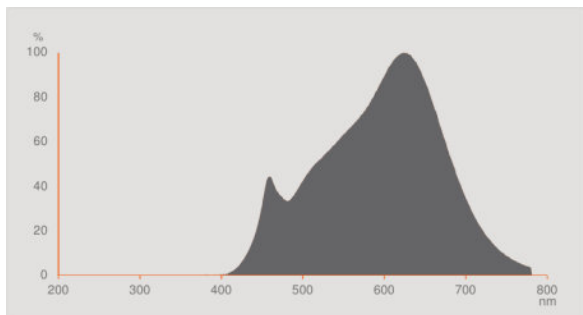

Spectral power distribution

**LOGISTICAL DATA**

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4058075095229	PPRO PAR 16 35 36° 4.9 W/3000 K GU10 DIM	Shipping carton box 10	257 mm x 110 mm x 70 mm	1.98 dm <sup>3</sup>	598.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

**REFERENCES / LINKS**

For dimming conformity see

- ▶ [www.ledvance.com/dim](http://www.ledvance.com/dim)

For further products and actual information concerning LED lamps see

- ▶ [www.ledvance.com/ledlamps](http://www.ledvance.com/ledlamps)

For Guarantee see

- ▶ [www.ledvance.com/guarantee](http://www.ledvance.com/guarantee)

**DISCLAIMER**

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.