

MASTER LEDspot LV

MASTER LEDspotLV 4W 827 MR11 24D



Delivering a warm, halogen-like accent beam, MASTER LEDspot LV is an ideal retrofit solution for spot and general lighting applications in the hospitality industry. It is particularly suited to public areas such as receptions, lobbies, corridors, stairwells and washrooms, where the light is on all the time. The robustly designed MASTER LEDspot offers a choice of beam angles for a clearly defined beam spread. There is no UV or IR in the beam, making it suitable for illuminating heat-sensitive objects (food, organic materials, paintings, etc.). The patented intelligent driver enables broad compatibility with existing electromagnetic and electronic halogen transformers. The dimmable versions drive further efficiencies, while helping to create the desired atmosphere.

Product data

• General Characteristics

Cap-Base	GU4
Bulb	MR11 [MR11]
Rated Lifetime (hours)	25000 hr
Nominal Lifetime hours	25000 hr

• Light Technical Characteristics

Colour Code	WW
Colour Designation	Warm White
Beam Angle	24 D
Beam Description	24D [Medium beam]
Correlated Colour Temperature	2700 K
Luminous Flux	140 Lm
Luminous Intensity	580 cd
Colour rendering index	80
Colour Temperature	2700 K [CCT 2700K]
Rated Luminous Flux	140 Lm

• Electrical Characteristics

Wattage	4 W
Wattage Technical	4.0 W
Voltage	12 V
Power Factor	0.44 -
Lamp Current mA	700 mA
Dimmable	No
Wattage Equivalent	20 W

• Environmental characteristics

Energy Efficiency Label (EEL)	A
-------------------------------	---

• Measuring Conditions

Switching cycle	50000x
-----------------	--------

• Product Dimensions

Overall Length C	40 mm
Diameter D	35 mm

• Product Data

Order code	119234 00
Full product code	871829111923400
Full product name	MASTER LEDspotLV 4W 827 MR11 24D
Order product name	MASTER LEDspotLV 4W 827 MR11 24D
Pieces per pack	1
Packing configuration	12
Packs per outerbox	12
Bar code on pack - EAN1	8718291119234
Bar code on outerbox - EAN3	8718291119241
Logistic code(s) - 12NC	929000178402
Net weight per piece	0.029 kg





PHILIPS

Warnings and Safety

- Operating temperature range is between -20° C and 45° C ambient
- Only to apply in dry or damp locations and most of open fixtures with lamp-holders that offer sufficient space (10 mm free air space)

- Not intended for use with emergency light fixtures or exit lights

Dimensional drawing

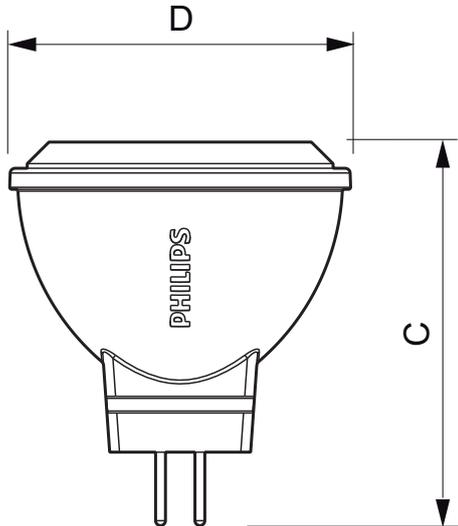

GU4

MASTER LEDspotLV 4W 827 MR11 24D

Product	C (Norm)	D (Norm)
LED 4-20W GU4 WW 2700K 12V MR11 24D	40	35



© 2013 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2013, November 26
data subject to change