



Ledinaire floodlight

BVP155 LED150/840 PSU 150W AWB CE

LED module 15000 lm - 840 neutral white - Power supply unit - Asymmetrical

This popular range of off-the-shelf floodlighting luminaires offers Philips high quality standards at a very competitive price. Reliable, energy efficient and affordable, Ledinaire is the perfect solution for a wide range of outdoor applications, from building façades and retail stores to billboards, underpasses and garden lighting.

Product data

General Information		Light Technical	
Lamp family code	LED150 [LED module 15000 lm]	Constant light output	No
Light source colour	840 neutral white	Number of products on MCB (16 A type B)	15
Light source replaceable	No	EU RoHS compliant	Yes
Number of gear units	-	Light source engine type	LED
Driver/power unit/transformer	PSU [Power supply unit]	Operating and Electrical	
Driver included	Yes	Input Voltage	220 to 240 V
Optical cover/lens type	GC [Clear glass]	Input frequency	50 or 60 Hz
Luminaire light beam spread	30° x 80°	Initial CLO power consumption	- W
Control interface	-	Average CLO power consumption	- W
Connection	Flying leads/cables	End CLO power consumption	- W
Cable	Cable 1.0 m without plug (CIK)	Inrush current	3.52 A
Protection class IEC	Safety class I	Inrush time	0.0254 ms
Flammability mark	NO [-]		
CE mark	CE mark		
ENEC mark	-		
Warranty period	5 years		
Optic type outdoor	Asymmetrical		

Ledinaire floodlight

Power factor (min.)	0.9
---------------------	-----

Controls and Dimming

Dimmable	No
----------	----

Mechanical and Housing

Housing material	Aluminium die-cast
Reflector material	Polycarbonate
Optic material	Polycarbonate
Optical cover/lens material	Glass
Fixation material	Steel
Mounting device	MBA [Mounting bracket adjustable]
Optical cover/lens shape	Flat
Optical cover/lens finish	Clear
Overall length	310 mm
Overall width	60 mm
Overall height	380 mm
Effective projected area	0.11 m ²
Colour	Aluminium and Grey
Dimensions (height x width x depth)	380 x 60 x 310 mm (15 x 2.4 x 12.2 in)

Approval and Application

Ingress protection code	IP65 [Dust penetration-protected, jet-proof]
Mech. impact protection code	IK08 [5 J vandal-protected]
Surge protection (common/differential)	Luminaire surge protection level up to 4 kV differential mode and 4 kV common mode

Initial Performance (IEC Compliant)

Initial luminous flux (system flux)	15000 lm
-------------------------------------	----------

Luminous flux tolerance	+/-10%
Initial LED luminaire efficacy	100 lm/W
Init. Corr. Colour Temperature	4000 K
Init. Colour rendering index	80
Initial chromaticity	<7 SDCM
Initial input power	150 W
Power consumption tolerance	+/-10%
Init. colour rendering index tolerance	+/-2

Over Time Performance (IEC Compliant)

Control gear failure rate at median useful life	10 %
50,000 h	
Lumen maintenance at median useful life*	L70
50,000 h	

Application Conditions


Ambient temperature range	-25 to +40 °C
Maximum dimming level	Not applicable

Product Data

Full product code	871016333129499
Order product name	BVP155 LED150/840 PSU 150W AWB CE
EAN/UPC – product	8710163331294
Order code	33129499
SAP numerator – quantity per pack	1
Numerator – packs per outer box	2
SAP material	911401733312
SAP net weight (piece)	4.960 kg



Dimensional drawing

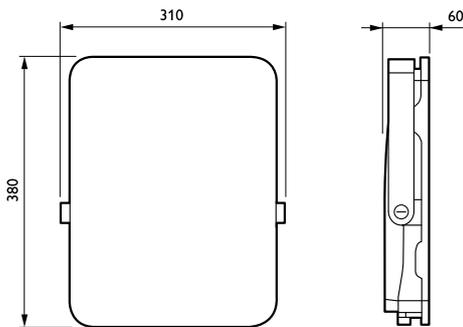

BVP155 LED150/840 PSU 150W AWB CE

Ledinaire floodlight

