



# **MASTER LEDspot MV**

## MAS LEDspotMV DimTone 4-35W GU10 40D

Delivering a warm, halogen-like accent beam, MASTER LEDspot MV is a perfect fit for spot lighting (track, corridors, lift lobbies, display cases and cabinets) in the hospitality industry. It is particularly suitable to public areas where the light is on 24/7, such as lobbies, corridors, stairwells.MASTER LEDspot MV delivers huge energy savings and minimizes maintenance cost without any compromise on brightness, enabling hospitality owners to achieve a return on their investment within one year. These LEDspots are compatible with most existing fixtures with a GU10 holder and designed as a retrofit replacement for halogen or incandescent spots. The dimmable versions drive further efficiencies, while helping to create the desired atmosphere.

#### **Product data**

| General Information                  |                               |  |
|--------------------------------------|-------------------------------|--|
| Cap base                             | GU10 [ GU10]                  |  |
| Nominal lifetime (nom.)              | 50000 h                       |  |
| Switching cycle                      | 50000X                        |  |
| Technical type                       | 4-35W                         |  |
|                                      |                               |  |
| Light Technical                      |                               |  |
| Colour code                          | 822-827 [ tunable warm white] |  |
| Beam Angle (Nom)                     | 40 °                          |  |
| Light distribution                   | 40D [ Medium beam]            |  |
| Luminous flux (nom.)                 | 305 lm                        |  |
| Luminous flux (rated) (nom.)         | 305 lm                        |  |
| Luminous intensity (nom.)            | 600 cd                        |  |
| Colour designation                   | Warm White (WW)               |  |
| Rated beam angle                     | 40 °                          |  |
| Correlated colour temperature (nom.) | 2200-2700 K                   |  |
| Luminous efficacy (rated) (nom.)     | 70.00 lm/W                    |  |

| Colour consistency                     | <6                 |
|--|--------------------|
| Color rendering index (nom.)           | 80                 |
| LLMF at end of nominal lifetime (nom.) | 70 %               |
| Luminous Flux in 90° Cone (Rated)      | 280 lm             |
|  |                    |
| Operating and Electrical               |                    |
| Input frequency                        | 50 to 60 Hz        |
| Power (Rated) (Nom)                    | 4 W                |
| Lamp current (nom.)                    | 22 mA              |
| Starting time (nom.)                   | 0.5 s              |
| Warm-up time to 60% light (nom.)       | instant full light |
| Power factor (nom.)                    | 0.5                |
| Voltage (Nom)                          | 220-240 V          |
|  |                    |
| Temperature                            |                    |
| T-Case maximum (nom.)                  | 70 °C              |
|  |                    |

Datasheet, 2019, September 3 data subject to change

### **MASTER LEDspot MV**

| Controls and Dimming          |       |
|-------------------------------|-------|
| Dimmable                      | Yes   |
|                               |       |
| Approval and Application      |       |
| Energy efficiency label (EEL) | A+    |
| Suitable for accent lighting  | Yes   |
| Energy Consumption kWh/1000 h | 4 kWh |
|                               |       |
| Product Data                  |       |

| Order product name              | MAS LEDspotMV DimTone 4-35W GU10 40D |  |
|---------------------------------|--------------------------------------|--|
| EAN/UPC – product               | 8718696438305                        |  |
| Order code                      | 43830500                             |  |
| Numerator – quantity per pack   | 1                                    |  |
| Numerator – packs per outer box | 10                                   |  |
| Material no. (12NC)             | 929001130702                         |  |
| Net weight (piece)              | 0.036 kg                             |  |
|                                 |                                      |  |

#### **Warnings and Safety**


Full product code

· Operating temperature range is between -20° C and 45° C ambient

871869643830500


- Only to apply in dry or damp locations and most of open fixtures with lamp-holders that offer sufficient space (10 mm free air space)
- Not intended for use with emergency light fixtures or exit lights


#### Dimensional drawing



| MAS LEDspotMV DimTone 4-35W GU10 40D 50 mm | Product                              | D     | С     |
|--|--------------------------------------|-------|-------|
|  | MAS LEDspotMV DimTone 4-35W GU10 40D | 50 mm | 55 mm |

#### Photometric data



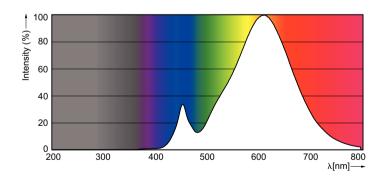

## **MASTER LEDspot MV**



© 2019 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.