



MASTER LEDspot MV Value

MAS LEDspotMV VLE D 4.3-50W GU10 830 25D

Delivering a warm, halogen-like accent beam, MASTER LEDspot MV is a perfect fit for spot lighting (track, corridors, lift lobbies, display cases and cabinets) in the hospitality industry. It is particularly suitable to public areas where the light is on 24/7, such as lobbies, corridors, stairwells. MASTER LEDspot MV delivers huge energy savings and minimises maintenance cost without any compromise on brightness, enabling hospitality owners to achieve a return on their investment within one year. These LEDspots are compatible with most existing fixtures with a GU10 holder and designed as a retrofit replacement for halogen or incandescent spots. The dimmable versions drive further efficiencies, while helping to create the desired atmosphere. For environments where the right atmosphere needs to be created (e.g. bars and restaurants), the “DimTone” feature could be useful. This is a LED feature that creates a warmer tone once light is dimmed down to lower intensities.

Product data

General Information		Luminous intensity (nom.)	
Cap base	GU10 [GU10]		1400 cd
Nominal lifetime (nom.)	35000 h	Colour Designation	Warm white (WW)
Switching cycle	50000X	Rated beam angle	25 °
Technical type	4.3-50W	Colour Temperature, horizontal (Nom)	3000 K
		Lamp Luminous Efficacy EM (Nom)	84.88 lm/W
		Colour consistency	<6
		Colour Rendering Index,horiz (Nom)	80
		LLMF at end of nominal lifetime (nom.)	70 %
		Luminous Flux in 90° Cone (Rated)	365 lm
Light Technical		Operating and Electrical	
Colour Code	830 [CCT of 3,000 K]	Input frequency	50 to 60 Hz
Technical Beam Angle (Nom)	25 °		
Light distribution	25D [Medium beam]		
Lamp Luminous Flux 25°C EL (Nom)	390 lm		
Lamp Luminous Flux (Nom)	390 lm		

MASTER LEDspot MV Value

Power (Rated) (Nom)	4.3 W
Lamp current (nom.)	23 mA
Starting time (nom.)	0.5 s
Warm-up time to 60% light (nom.)	instant full light
Power factor (nom.)	0.7
Voltage (Nom)	220-240 V

Temperature

T-Case maximum (nom.)	83 °C
-----------------------	-------

Controls and Dimming

Dimmable	yes
----------	-----

Approval and Application

Energy efficiency label (EEL)	A++
-------------------------------	-----

Suitable for accent lighting	Yes
Energy Consumption kWh/1000 h	5 kWh


Product Data

Full product code	871869643844200
Order product name	MAS LEDspotMV VLE D 4.3-50W GU10 830 25D
EAN/UPC – product	8718696438442
Order code	929001130202
Numerator – quantity per pack	1
Numerator – packs per outer box	10
Material no. (12NC)	929001130202
Net weight (piece)	0.036 kg

Warnings and Safety

- Operating temperature range is between -20° C and 45° C ambient
- Only to apply in dry or damp locations and most of open fixtures with lamp-holders that offer sufficient space (10 mm free air space)
- Not intended for use with emergency light fixtures or exit lights



Dimensional drawing



LED VLE D 4.3-50W GU10 830 25D

Product	D	C
MAS LEDspotMV VLE D 4.3-50W GU10 830 25D	50 mm	55 mm

Photometric data

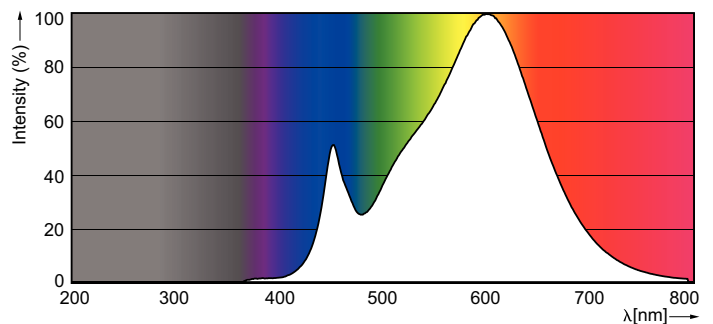

MASTER LEDspot MV Value

