



CorePro LEDcandle

Corepro lustre ND 5.5-40W E14 827 P45 CL

The frosted CorePro LEDcandle is designed for retrofit replacement of incandescent lamps. It is compatible with fixtures with an E14 holder and is an attractive product for chandeliers. LEDlamps deliver huge energy savings and minimize maintenance cost.


Product data

General Information		Temperature	
Cap base	E14 [E14]	Warm-up time to 60% light (nom.)	0.5 s
EU RoHS compliant	Yes	Power factor (nom.)	0.5
Nominal lifetime (nom.)	15000 h	Voltage (Nom)	220-240 V
Switching cycle	50,000X	Temperature	
Technical type	5.5-40W	T-Case maximum (nom.)	85 °C
Light Technical		Controls and Dimming	
Colour Code	827 [CCT of 2,700 K]	Dimmable	No
Luminous flux (nom.)	470 lm	Mechanical and Housing	
Colour designation	Warm White (WW)	Lamp Finish	Clear
Correlated Colour Temperature (Nom)	2700 K	Bulb shape	P45 [P 45mm]
Luminous efficacy (rated) (nom.)	90.91 lm/W	Approval and Application	
Colour consistency	<6	Energy consumption kWh/1,000 hours	6 kWh
Colour rendering index (nom.)	80	Product Data	
LLMF at end of nominal lifetime (nom.)	70 %	Full product code	871869645483100
Operating and Electrical		Order product name	Corepro lustre ND 5.5-40W E14 827 P45 CL
Input frequency	50 to 60 Hz	EAN/UPC – product	8718696454831
Power (Rated) (Nom)	5.5 W	Order code	45483100
Lamp current (nom.)	50 mA	SAP numerator – quantity per pack	1
Wattage equivalent	40 W		
Starting time (nom.)	0.5 s		

CorePro LEDcandle

Numerator – packs per outer box	10
SAP material	929001142602
SAP net weight (piece)	0.040 kg



Dimensional drawing



LED ND 5.5-40W E14 827 220-240V P45 CL


Product	D	C
Corepro lustre ND 5.5-40W E14 827 P45 CL	45 mm	88 mm

Photometric data

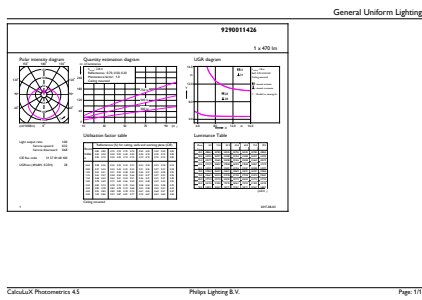

CorePro LEDlustre 40W E14 827 CL P45 ND


CorePro LEDlustre 40W E14 827 CL P45 ND

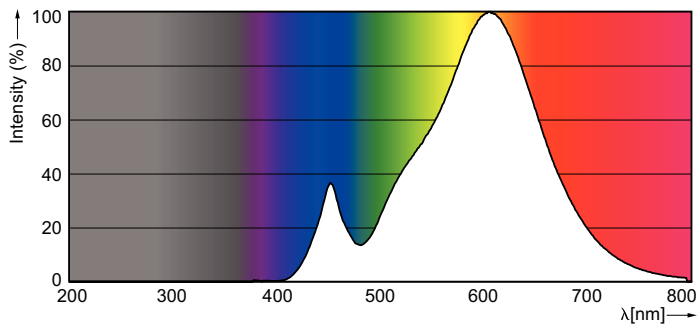


SDPO_LEDLSR_0003-Spectral Power distribution

CorePro LEDcandle

Lifetime

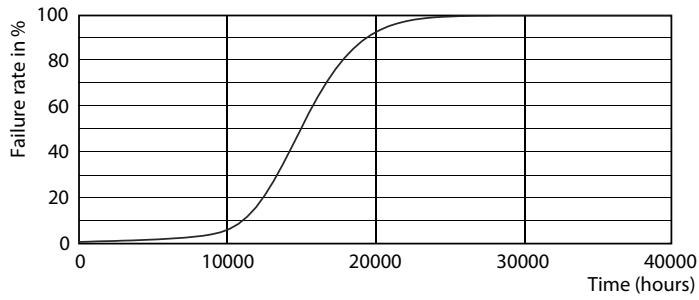

LEDbulb 60W E14 827 FR B38

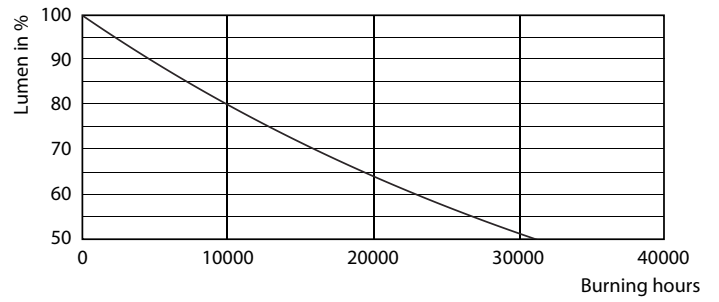

LEDbulb 60W E14 827 FR B38

