



MASTER LEDspot MV Value

MAS LEDspotMV D 4-35W GU10 940 40D

Delivering a warm, halogen-like accent beam, MASTER LEDspot MV is a perfect fit for spot lighting (track, corridors, lift lobbies, display cases and cabinets) in the hospitality industry. It is particularly suitable to public areas where the light is on 24/7, such as lobbies, corridors, stairwells. MASTER LEDspot MV delivers huge energy savings and minimises maintenance cost without any compromise on brightness, enabling hospitality owners to achieve a return on their investment within one year. These LEDspots are compatible with most existing fixtures with a GU10 holder and designed as a retrofit replacement for halogen or incandescent spots. The dimmable versions drive further efficiencies, while helping to create the desired atmosphere. For environments where the right atmosphere needs to be created (e.g. bars and restaurants), the “DimTone” feature could be useful. This is a LED feature that creates a warmer tone once light is dimmed down to lower intensities.

Product data

General Information			
Cap base	GU10 [GU10]	Luminous intensity (nom.)	624 cd
Nominal lifetime (nom.)	50000 h	Colour Designation	White (WH)
Switching cycle	50000X	Rated beam angle	40 °
Technical type	4-35W	Colour Temperature, horizontal (Nom)	4000 K
		Lamp Luminous Efficacy EM (Nom)	71.25 lm/W
		Colour consistency	<6
		Colour Rendering Index,horiz (Nom)	90
		LLMF at end of nominal lifetime (nom.)	70 %
		Luminous Flux in 90° Cone (Rated)	295 lm
Light Technical			
Colour Code	940 [CCT of 4,000 K]		
Technical Beam Angle (Nom)	40 °		
Light distribution	40D [Medium beam]		
Lamp Luminous Flux 25°C EL (Nom)	314 lm		
Lamp Luminous Flux (Nom)	314 lm		
		Operating and Electrical	
		Input frequency	50 to 60 Hz

MASTER LEDspot MV Value

Power (Rated) (Nom)	4 W
Lamp current (nom.)	21 mA
Wattage equivalent	35 W
Starting time (nom.)	0.5 s
Warm-up time to 60% light (nom.)	instant full light
Power factor (nom.)	0.84
Voltage (Nom)	220-240 V

Temperature

T-Case maximum (nom.)	90 °C
-----------------------	-------

Controls and Dimming

Dimmable	yes
----------	-----

Approval and Application

Energy efficiency label (EEL)	A+
-------------------------------	----

Suitable for accent lighting	Yes
Energy Consumption kWh/1000 h	4 kWh


Product Data

Full product code	871869645739900
Order product name	MAS LEDspotMV D 4-35W GU10 940 40D
EAN/UPC – product	8718696457399
Order code	929001139702
Numerator – quantity per pack	1
Numerator – packs per outer box	10
Material no. (12NC)	929001139702
Net weight (piece)	0.036 kg

Warnings and Safety

- Operating temperature range is between -20° C and 45° C ambient
- Only to apply in dry or damp locations and most of open fixtures with lamp-holders that offer sufficient space (10 mm free air space)
- Not intended for use with emergency light fixtures or exit lights



Dimensional drawing



LED D 4-35W GU10 940 40D

Product	D	C
MAS LEDspotMV D 4-35W GU10 940 40D	50 mm	57 mm

Photometric data

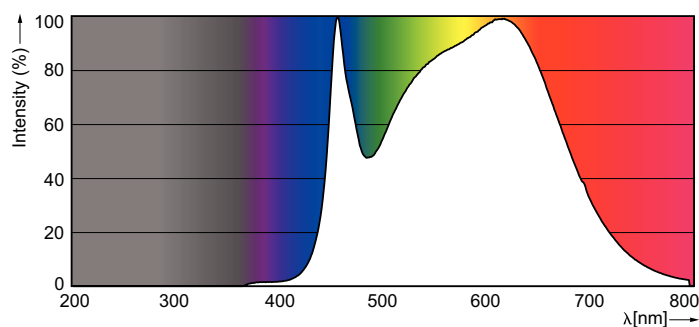

MASTER LEDspot MV Value

