


# Start Flood IP66 21000lm 740 ASYM

Item No: 0048211


**SYLVANIA**

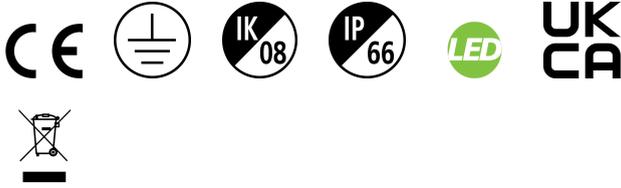


Exterior LED Floodlight, comes complete with 1500mm flying lead and adjustable bracket, aluminium housing, clear glass diffuser, IP66, IK08, Class I, 4000K, Non-dimming, 20600lm, 150W, 137lm/W, CRI70, Asymmetrical Wide beam angle (65° x 120° imax@55°), 100000 hrs L90B10 lifespan, 451 x 330 x 77mm (LxWxD) dimensions, 4.6kg weight.

## Technical Assets

### Dimensions (mm)

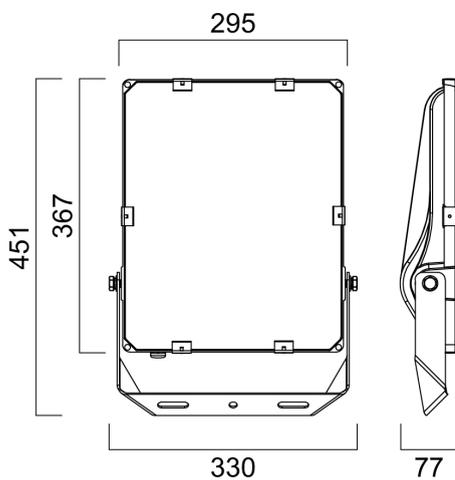

### Photometrics



# Start Flood IP66 21000lm 740 ASYM

Item No: 0048211

**SYLVANIA**

## General data

Product name	Start Flood IP66 21000lm 740 ASYM
Technology	LED
General application	Logistics & Industry
Operating temperature range (°C)	-30°C...+50°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001744
E-number FI	4579463
Warranty	5 years

## Optical data

Fixture luminous flux (lm)	20600
Luminaire efficacy (lm/W)	137
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	70
Beam Angle (°)	65*120
Photobiological Risk Group	RG1

## Electrical data

Total power consumption (W)	150
Lamp power factor	0.99
Electrical protection	Class I
Drive current (mA)	2850
Inrush Current (A)	60
Inrush Duration (µs)	650
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	4
Max. products per 13A C Breaker	5
Max. products per 16A C Breaker	6
Max. products per 20A C Breaker	8
Max. products per 10A B Breaker	2
Max. products per 13A B Breaker	3
Max. products per 16A B Breaker	4
Max. products per 20A B Breaker	5
Mains surge immunity (differential mode -> L-N) (kV)	6
Mains surge immunity (common mode -> L/N - GND) (kV)	10

## Lifetime data

Lifespan L70 B50	100000
Lifespan L80 B20	100000
Lifespan L90 B10	100000

## Physical data

IP rating	IP66
IK rating	IK08
Nominal Product Length (mm)	451
Nominal Product Width (mm)	330
Nominal Product Height (mm)	77
Weight (kg)	4.6

# Start Flood IP66 21000lm 740 ASYM

Item No: 0048211

**SYLVANIA**

## Packaging

Product EAN number	5410288482118
Packaging single length / height (cm)	52.0
Packaging single width (cm)	13.0
Packaging single depth (cm)	37.0
DUN14 (inner)	05410288482118
Units per outer package	1
Packaging outer length / height (cm)	52.0
Packaging outer width (cm)	13.0

## Safety data

Optimal operating condition (°C) | -30-50