



RefLED Superia V3 ES50 & MR16

Light in its purest form

Sylvania expands its comprehensive LED product range with the RefLED Superia V3, a true retrofit replacement for a Halogen GU10 and MR16, with the energy saving and long life benefits of LED technology. The RefLED Superia V3 has been created with a unique shallow depth, full diameter, halogen faceted lens design which maintains a traditional lamp aesthetic whilst delivering high efficacy and a stunning lit effect.

The unique halogen inspired faceted lens designs allow the full front face of the lens to light up without any visible heat sink. This allows the lamp to be used in any colour downlight or spotlight without colours clashing between lamp and fixture and offering a wide aperture of light unlike conventional LED lamps.

The RefLED Superia V3 dimmable and non-dimmable options are available with an impressive 25,000 hours life span meaning minimum maintenance and can be installed in 'hard to access' areas such as high ceilings and stairways. The RefLED Superia V3 is available in three colour temperatures – 2700K, 3000K and 4000K – offering customers a choice of light colour to suit their needs.

RefLED Superia ES50 V2.1 delivers superior quality mains voltage LED lighting


Features

- High performance energy efficient LED GU10 with size and visual appearance of halogen lamp
- High lumen output: 400lm-425lm-450lm
- Unique halogen faceted lens design Ideal for use with any colour downlight
- 25,000 hours average rated life
- Low power consumption - A+/A++ energy rating
- Available in 25° and 40° beam angles.
- Operating voltage: 198-254V Power factor: 0.90 (dimmable) and 0.50 (non-dimmable)
- High lumen efficacy - up to 90Lm/W
- Available in 2700K, 3000K and 4000K Dimmable on approved dimmers



Code	General description	EAN code	Colour	Watt (W)	Lm/W	Useful Luminous Flux (lm)	Candela (Cd)	Beam (°)	Dimmable	Life (hours)	Energy Class
Non dimmable											
0027925	RefLED SUPERIA ES50 V3 400LM 827 25° SL	5410288279251	827	5.0	80	400	1400	25	No	25.000	A++
0027926	RefLED SUPERIA ES50 V3 400LM 827 40° SL	5410288279268	827	5.0	80	400	600	40	No	25.000	A++
0027927	RefLED SUPERIA ES50 V3 425LM 830 25° SL	5410288279275	830	5.0	85	425	1500	25	No	25.000	A++
0027928	RefLED SUPERIA ES50 V3 425LM 830 40° SL	5410288279282	830	5.0	85	425	650	40	No	25.000	A++
0027929	RefLED SUPERIA ES50 V3 450LM 840 25° SL	5410288279299	840	5.0	90	450	1600	25	No	25.000	A++
0027930	RefLED SUPERIA ES50 V3 450LM 840 40° SL	5410288279305	840	5.0	90	450	700	40	No	25.000	A++
Dimmable											
0027931	RefLED SUPERIA ES50 V3 400LM DIM 827 25° SL	5410288279312	827	5.5	73	400	1400	25	Yes	25.000	A+
0027932	RefLED SUPERIA ES50 V3 400LM DIM 827 40° SL	5410288279329	827	5.5	73	400	600	40	Yes	25.000	A+
0027933	RefLED SUPERIA ES50 V3 425LM DIM 830 25° SL	5410288279336	830	5.5	77	425	1500	25	Yes	25.000	A+
0027934	RefLED SUPERIA ES50 V3 425LM DIM 830 40° SL	5410288279343	830	5.5	77	425	650	40	Yes	25.000	A+
0027935	RefLED SUPERIA ES50 V3 450LM DIM 840 25° SL	5410288279350	840	5.5	82	450	1600	25	Yes	25.000	A+
0027936	RefLED SUPERIA ES50 V3 450LM DIM 840 40° SL	5410288279367	840	5.5	82	450	700	40	Yes	25.000	A+

Dimensions (mm)

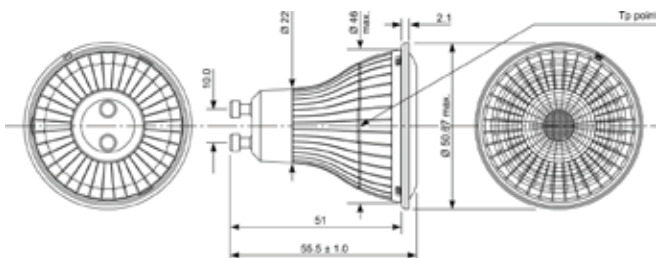

Spectral Data

