



# Trueforce CorePro LED HPL

## TForce Core LED HPL 26W E27 840 FR

Philips TrueForce Core LED HPL lamps are an easy, LED solution with a short pay-back to replace High-Intensity Discharge (HID) lamps. This new generation of LED Core post-top lamps brings all the energy-efficiency and long-lifetime benefits of LED-to-HID replacement, while delivering instant saving for a low initial investment. Furthermore, TrueForce CorePro LED HPL lamps are designed to have the same lamp size and light distribution as their HID alternatives. And thanks to our high-power LED filament technology, you'll never know the difference. Plus, their unique IP65 design means that TrueForce Core LED HPL Post-Top lamps can be used for outdoor, as well as indoor applications.

### Warnings and Safety

• Installation must always be performed by a qualified electrician or installer. Use the installation guide for instructions.

### Product data

General Information		Colour designation	
Cap base	E27 [E27]	Colour designation	Cool White (CW)
Nominal lifetime	25,000 h	Correlated Colour Temperature	4000 K
Switching Cycle	15,000	Luminous efficacy (rated) (nom.)	153 lm/W
Lighting Technology	LED	Colour consistency	<6
CE mark	Yes	Colour rendering index (CRI)	80
EU RoHS compliant	Yes	LLMF at end of nominal lifetime (nom.)	0.7 %
Flux measurement reference	Sphere	Flickering value (PstLM)	1
		Stroboscopic effect	1.6
		Photobiological safety according to EN 62471	RG1
Light Technical		Operating and Electrical	
Colour Code	840 [CCT of 4000K]	Line Frequency	50 to 60 Hz
Beam angle (nom.)	300 degree(s)	Input frequency	50 to 60 Hz
Luminous Flux	4,000 lm		

# Trueforce CorePro LED HPL

Power Consumption	26 W
Lamp current (nom.)	145 mA
Starting time (nom.)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.9
Voltage (nom.)	220-240 V
Max. lamp no. on MCB B type 10A — Mains	6
Max. lamp no. on MCB B type 10A — EM ballast without Comp. Cap.	-
Max. lamp no. on MCB B type 10A — EM ballast with Comp. Cap.	-
Max. lamp no. on MCB B type 16A — Mains	9
Max. lamp no. on MCB B type 16A — EM ballast without Comp. Cap.	-
Max. lamp no. on MCB B type 16A — EM ballast with Comp. Cap.	-


## Temperature

Ambient temperature range	-30 to +45 °C
T-Case maximum (nom.)	54 °C

## Controls and Dimming

Dimmable	No
----------	----

## Dimensional drawing



## Mechanical and Housing

Lamp Finish	Frosted
Bulb shape	ED90 [ED 90 mm]

## Approval and Application

Energy Efficiency Class	D
Energy consumption kWh/1,000 hours	26 kWh
EPREL registration number	403623



## Product Data

Order product name	TForce Core LED HPL 26W E27 840 FR
Full product name	TForce Core LED HPL 26W E27 840 FR
Full EOC	871869975035000
Order code	75035000
Material no. (12 NC)	929002350202
SAP numerator – quantity per pack	1
EAN/UPC – Product/Case	8718699750350
Numerator – packs per outer box	6
EAN/UPC - Case	8718699750367

Product	D	C
TForce Core LED HPL 26W E27 840 FR	90 mm	245 mm


# Trueforce CorePro LED HPL

## Photometric data

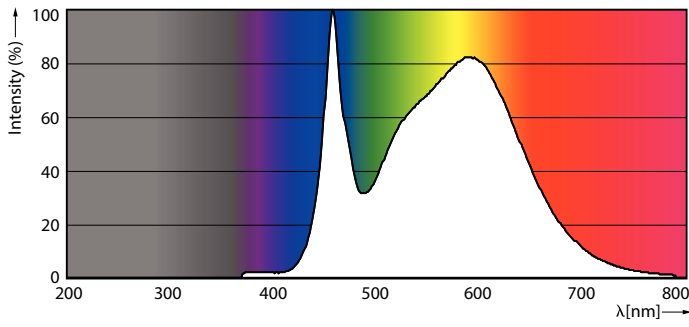

Spectral Power Distribution Colour - TForce Core LED HPL 26W E27 840 FR

Light Distribution Diagram - TForce Core LED HPL 26W E27 840 FR



General uniform lighting - TForce Core LED HPL 26W E27 840 FR

## Lifetime



Life Expectancy Diagram - TForce Core LED HPL 26W E27 840 FR



Lumen Maintenance Diagram - TForce Core LED HPL 26W E27 840 FR

## Trueforce CorePro LED HPL

