OSRAM

POSIVO LED

POSIVO LED | Round shaped LED ceiling luminaires

Areas of application

- Entrances / Hallways
- High traffic areas in public buildings
- Stairways

—

Product benefits

- Efficient luminaire for replacement of compact fluorescent lamp luminaires
- Pleasant homogenous light
- Provides for pleasant room atmosphere
- Wide light distribution
- Timeless design with familiar form factors

Product features

- Available with on/off switch or sensor
- IR light and presence sensor
- UV-resistant diffuser with ring made of brushed metal
- Housing material: sheet steel
- Color temperature: 3,000 K
- Color rendering index R_a: > 80
- Protection class: I
- Impact resistance: IK04
- Lifetime (L70/B50): up to 35,000 h

CE IP 20

Technical data

Electrical data

Operating mode	ECG
Nominal wattage	16 W
Nominal voltage	220...240 V

Photometrical data

Color temperature	3000 K
Luminous flux	840 lm
Color rendering index Ra	>80
Luminous flux net	840 lm

Dimensions & weight

Product weight	666.00 g

Colors & materials

Body material	sheet steel
Product color	white
Cover material	PMMA

Capabilities

Type of installation	surface-mounted
Type of connection	terminal, 3-pole

Certificates & standards

Protection class	insulation class I (protective earthing)
Type of protection	IP20
Protection against ignition and fire	F

Product datasheet

Country specific categorizations

Order reference	POSIVO LED

Light Distribution
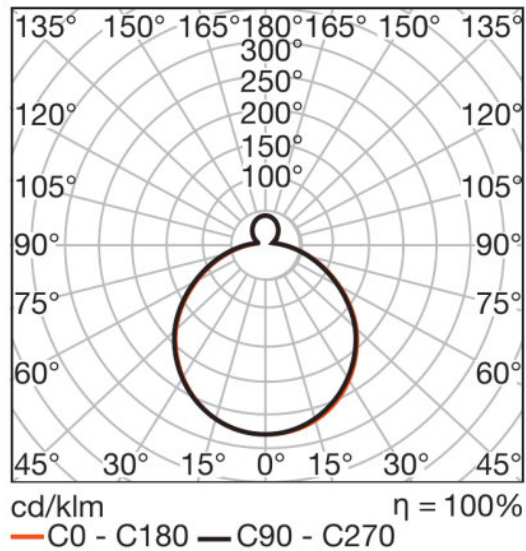
LDC typ polar

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4008321854629	POSIVO LED	Shipping carton box 4	481 mm x 356 mm x 368 mm	63.01 dm³	5621.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.