

## PRODUCT DATASHEET

### ST CLAS P 40 CL 4 W/2700 K E14

LED Retrofit CLASSIC P | LED lamps, classic mini-ball shape



#### Areas of application

- Perfect for decorative installations
- Domestic applications
- General illumination
- Outdoor use in suitable outdoor luminaires only

#### Product benefits

- Very low energy consumption
- Lamps with innovative LED "filament" technology
- No UV and near-IR radiation in the light beam
- Instant 100 % light, no warm-up time
- Can be easily fitted instead of ordinary light bulbs
- Lower thermal output (compared with the standard reference product)
- Design, dimensions, luminous flux comparable to an incandescent or halogen lamp

#### Product features

- Professional LED lamps for line voltage
- Not dimmable
- Beam angle: up to 300°



- Lifetime: up to 15,000 h
- Lamp made of glass
- Good quality of light; color rendering index  $R_a \geq 80$ ; constant chromaticity


## TECHNICAL DATA

### Electrical data


Nominal wattage	4 W
Construction wattage	4.00 W
Nominal voltage	220...240 V
Claimed equiv. conventional lamp power	40 W
Nominal current	32 mA
Type of current	AC
Inrush current	7.3 A
Operating frequency	50...60 Hz
Mains frequency	50...60 Hz
Max. lamp no. on circuit break. 10 A (B)	156
Max. lamp no. on circuit break. 16 A (B)	250
Power factor $\lambda$	> 0.50

### Photometrical data

Luminous flux	470 lm
Nominal useful luminous flux 90°	470 lm
Luminous efficacy	117 lm/W
Lumen main.fact.at end of nom.life time	0.70
Light color (designation)	Warm White
Color temperature	2700 K
Color rendering index Ra	≥80
Light color	827
Standard deviation of color matching	≤6 sdc <sub>m</sub>
Rated LLMF at 6,000 h	0.80

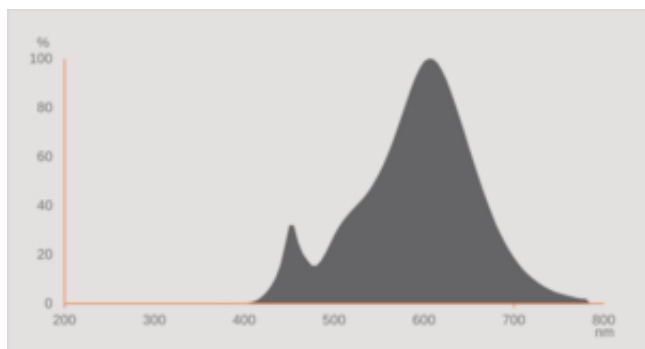

Spectral power distribution

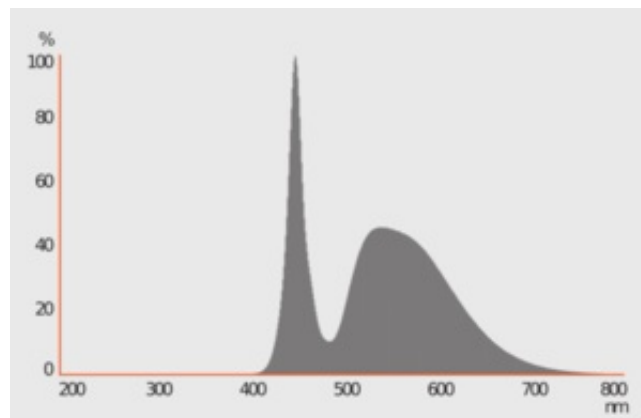

Spectral power distribution

### Light technical data

Beam angle	300 °
Warm-up time (60 %)	< 0.50 s
Starting time	< 0.5 s
Rated beam angle (half peak value)	300.00 °

### Dimensions & Weight



Overall length	77.00 mm
Diameter	45.00 mm
Maximum diameter	45 mm
Product weight	15.00 g

### Temperatures & operating conditions

Ambient temperature range	-20...+40 °C
Maximum temperature at tc test point	65 °C

### Lifespan

Lifespan	15000 h
Number of switching cycles	100000
Lumen maintenance at end of serv	0.70
Rated lamp survival factor at 6,000	≥ 0.90

### Additional product data

Base (standard designation)	E14
Mercury content	0.0 mg
Mercury-free	Yes
Design / version	Clear
Product remark	All technical parameters apply to the entire lamp / Due to the complex production process for light-emitting diodes, the typical values shown for the technical LED parameters are purely statistical values that do not necessarily match the actual technical parameters of each individual product, which can vary from the typical value

### Capabilities

Dimmable	No
----------	----

### Certificates & Standards

Energy efficiency class	E <sup>1)</sup>
Energy consumption	4.00 kWh/1000h
Type of protection	IP20
Standards	CE
Photobiological safety group acc. to EN62778	RG0

<sup>1)</sup> Energy efficiency class (EEC) on a scale of A++ (highest efficiency) to E (lowest efficiency)




### Country-specific categorizations

ILCOS	DRBP/C-4/827-220/240-E14-45
Order reference	LEDSCLP40 4W/82

### Energy labelling regulation data acc EU 2019/2015

Light source cap-type (or other electric interface)	E14
Correlated colour temperature type	SINGLE_VALUE
Length	77.00 mm
Height	45.00 mm
Width	45.00 mm
EPREL ID	1403383,523074

## DOWNLOAD DATA

DOWNLOAD DATA	
	PRODUCT DATASHEET
	Declarations Of Conformity CE
	Declarations Of Conformity CE

## LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075112018	Blister 2	46 mm x 140 mm x 185 mm	58.00 g	1.19 dm <sup>3</sup>
4058075434288	Folding box 2	46 mm x 95 mm x 130 mm	48.00 g	0.57 dm <sup>3</sup>
4058075330535	Folding box 2	45 mm x 78 mm x 89 mm	114.00 g	0.31 dm <sup>3</sup>
4058075436527	Folding box 1	46 mm x 49 mm x 130 mm	27.00 g	0.29 dm <sup>3</sup>
4052899941670	Blister 1	45 mm x 140 mm x 120 mm	26.00 g	0.76 dm <sup>3</sup>
4058075112025	Shipping box 12	285 mm x 153 mm x 201 mm	475.00 g	8.76 dm <sup>3</sup>
4058075434295	Shipping box 10	245 mm x 90 mm x 100 mm	332.00 g	2.21 dm <sup>3</sup>
4058075330542	Shipping box 10	245 mm x 90 mm x 100 mm	632.00 g	2.21 dm <sup>3</sup>
4058075604261	Shipping box 6	159 mm x 111 mm x 106 mm	218.00 g	1.87 dm <sup>3</sup>
4058075605336	Shipping box 6	159 mm x 111 mm x 106 mm	214.00 g	1.87 dm <sup>3</sup>
4052899941885	Shipping box 6	285 mm x 153 mm x 132 mm	281.00 g	5.76 dm <sup>3</sup>
4052899942097	0			

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

## DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.