

# PRODUCT DATASHEET

## P R63 60 36 ° 5.9 W/2700 K E27

OSRAM DULUX® D LED EM & AC MAINS | LED replacement for CFLni, 2 tubes, with 2-pin G24d base for CCG and AC mains operation



---

### Areas of application

- Shops and exhibition rooms
- Domestic applications
- Commercial applications
- Accent lighting
- Outdoor use in outdoor luminaires only (minimum IP65)

---

### Product benefits

- Quick, simple and safe replacement without rewiring
- Design, dimensions, luminous flux comparable to an incandescent or halogen lamp
- Low maintenance costs thanks to long lifetime
- No UV and near-IR radiation in the light beam
- Very high dimmer compatibility, see also [www.ledvance.com/dim](http://www.ledvance.com/dim)
- Instant 100 % light, no warm-up time

---

### Product features

- LED alternative to high voltage halogen lamps
- High color consistency:  $\leq 5$  SDCM



- Dimmable
- Base: E27
- Lamp made of glass
- Very high color rendering ( $R_a$ : 90)
- Lifetime: up to 25,000 h

---

## TECHNICAL DATA

### Electrical data

Nominal wattage	5.9 W
Nominal voltage	220...240 V
Claimed equiv. conventional lamp power	60 W
Nominal current	32 mA
Type of current	AC
Inrush current	1 A
Operating frequency	50...60 Hz
Mains frequency	50...60 Hz
Max. lamp no. on circuit break. 10 A (B)	183
Max. lamp no. on circuit break. 16 A (B)	293
Power factor $\lambda$	> 0,50


### Photometrical data

Luminous intensity	600 cd
Luminous flux	345 lm
Nominal useful luminous flux 90°	345 lm
Luminous efficacy	58 lm/W
Lumen main.fact.at end of nom.li	0.70
Light color (designation)	Warm White
Color temperature	2700 K
Color rendering index Ra	≥90
Light color	927
Standard deviation of color matching	≤5 sdcn
Rated peak intensity	600 cd
Rated LLMF at 6,000 h	0.80

### Light technical data

Beam angle	36 °
Warm-up time (60 %)	< 0.50 s
Starting time	< 0.5 s
Rated beam angle (half peak value)	36.00 °

### Dimensions & weight

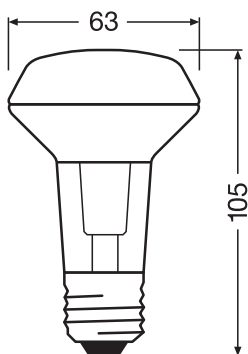

Overall length	102.00 mm
Length	102.00 mm
Diameter	63.00 mm
Maximum diameter	63 mm
Product weight	107.000 g

### Temperatures & operating conditions

Ambient temperature range	-20...+40 °C
Maximum temperature at tc test point	83 °C

### Lifespan

Nominal lamp life time	25000 h
Rated lamp life time	25000 h
Number of switching cycles	100000
Lumen maintenance at end of serv	0.70
Rated lamp survival factor at 6,000	≥ 0.90

### Additional product data

Base (standard designation)	E27
Mercury content	0.0 mg
Mercury-free	Yes
Product remark	All technical parameters apply to the entire lamp / Due to the complex production process for light-emitting diodes, the typical values shown for the technical LED parameters are purely statistical values that do not necessarily match the actual technical parameters of each individual product, which can vary from the typical value

### Capabilities

Dimmable	Yes
----------	-----



## Certificates & standards






Energy efficiency class	A+ <sup>1)</sup>
Energy consumption	6.00 kWh/1000h
Type of protection	IP20
Standards	CE / EAC

<sup>1)</sup> Energy efficiency class (EEC) on a scale of A++ (highest efficiency) to E (lowest efficiency)

## Country-specific categorizations

Order reference	LEDPR6360D 5,9W
-----------------	-----------------

## DOWNLOAD DATA

DOWNLOAD DATA	
	Certificates EAEC N RU D-DE.MYu62.B.00930 20 06.03.2020-05.03.2025
	Certificates EAEC N RU D-DE.MYu62.B.00975 20 10.03.2020-09.03.2025
	Certificates EAEC N RU D-DE.MYu62.B.01101 20 16.03.2020-15.03.2025
	IES file (IES) AC08055_R63 60 D 4,5W 260V GL E27
	LDT file (Eulumdat) AC08055_R63 60 D 4,5W 260V GL E27

## LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075448582	Folding box 1	65 mm x 65 mm x 107 mm	130.00 g	0.45 dm <sup>3</sup>
4058075448599	Shipping box 10	357 mm x 147 mm x 125 mm	1433.00 g	6.56 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

## References / Links

- For dimming conformity see [www.ledvance.com/dim](http://www.ledvance.com/dim)
- For further products and actual information concerning LED lamps see [www.ledvance.com/ledlamps](http://www.ledvance.com/ledlamps)
- For Guarantee see [www.ledvance.com/guarantee](http://www.ledvance.com/guarantee)

## DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.