



MASTER VALUE LEDs pot LV

MAS LEDspotLV VLE D6.3-35W 830MR16 24DRN

Philips MASTER VALUE MR16 is the series of Low Voltage (12VAC) Halogen MR16 replacements. Not only does it employ Philips' patented solution to guarantee the broadest possible compatibility with standard 12V Halogen electronic transformers. It also delivers beam intensity which is equivalent to the 50W Philips Halogen MR16 lamps. The form-factor of Philips MASTER Value LED MR16 guarantees a 100% form on the back-side of the lamp (exact form with Halogen lamps.)

Product data

General Information	
Cap-Base	GU5.3 [GU5.3]
Nominal Lifetime (Nom)	25000 h
Switching Cycle	50000X
Technical Type	6.3-35W
Light Technical	
Color Code	830 [CCT of 3000K]
Beam Angle (Nom)	24 °
Light Distribution	Medium beam 24°
Luminous Flux (Nom)	395 lm
Luminous Flux (Rated) (Nom)	395 lm
Luminous Intensity (Nom)	1800 cd
Color Designation	White (WH)
Rated Beam Angle	24 °
Correlated Color Temperature (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	63 lm/W
Color Consistency	<6
Color Rendering Index (Nom)	80

LLMF At End Of Nominal Lifetime (Nom)	70 %
Luminous Flux in 90° Cone (Rated)	395 lm
Operating and Electrical	
Power (Rated) (Nom)	6.3 W
Lamp Current (Nom)	800 mA
Starting Time (Nom)	0.5 s
Warm Up Time to 60% Light (Nom)	instant full light
Power Factor (Nom)	0.7
Voltage (Nom)	12 V
Temperature	
T-Case Maximum (Nom)	100 °C
Controls and Dimming	
Dimmable	Yes
Approval and Application	
Energy Efficiency Label (EEL)	A

MASTER VALUE LEDspot LV


Suitable For Accent Lighting	Yes
Energy Consumption kWh/1000 h	7 kWh
Product Data	
Full product code	871869649023500
Order product name	MAS LEDspotLV VLE D6.3-35W 830MR16 24DRN
EAN/UPC - Product	8718696490235

Order code	929001151802
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	929001151802
Net Weight (Piece)	0.045 kg

Warnings and Safety

- Operating temperature range is between -20° C and 45° C ambient
- Only to apply in dry or damp locations and most of open fixtures with lamp-holders that offer sufficient space (10 mm free air space)
- Not intended for use with emergency light fixtures or exit lights


Dimensional drawing




MR16 Black 12V 6.5-35W 24D 3000K D 25khr

Product	D	C
MAS LEDspotLV VLE D6.3-35W 830MR16 24DRN	51 mm	51 mm

Photometric data



6.3-35 W GU5.3 /830 MR16 24D

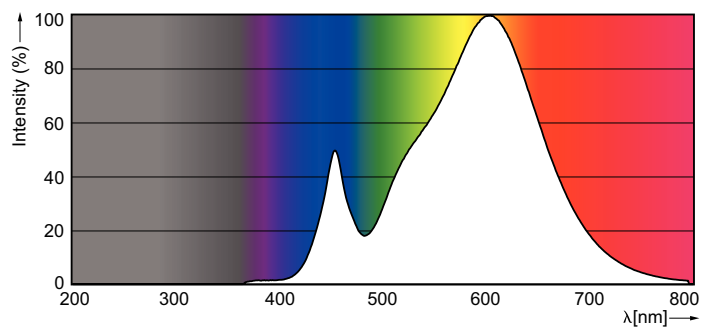

VLE D 6.3-35 W GU5.3 /830 MR16

MASTER VALUE LEDspot LV

